


NS1085B USB Host Controller for Smartphone

Introduction

NS1085B is a high-performance USB 3.0 Flash Card controller and USB 2.0 host controller designed specifically for smartphone applications. It is fully in compliance with Apple MFi Specification, supporting MFi USB Role Switch and iAP2 protocols such as EA Native Transport, Device Powered, and App Launch. It also supports Android Open Accessory (AOA) Protocol 2.0 and USB Battery Charging (BC) 1.2 CDP advertisement. On one side, NS1085B connects with up to two USB interfaces such as Type-A, Type-C, and Apple Lightning Interface. On the other side, it connects with up to two 4-bit flash media cards, such as Secure Digital (SD) and microSD (T-Flash); or one 8-bit flash card such as Embedded-MultiMediaCard (eMMC).

Block Diagram

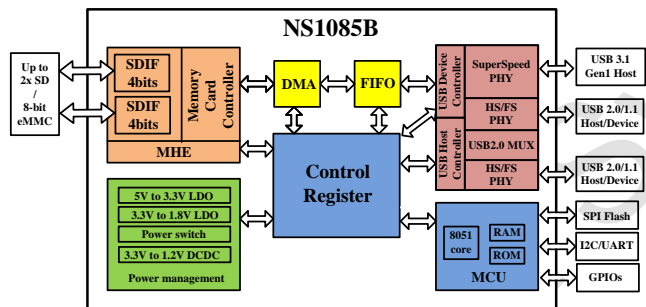

Highlights

- Two low-power USB 2.0 Host specifically optimized for smartphone applications. Each USB 2.0 transceiver can be configured to either USB 2.0/1.1 Host or USB 2.0/1.1 device. An integrated USB 2.0 MUX enables data selection from one of the USB 2.0 transceivers.
- Support AOA Protocol 2.0, allowing USB accessory built with NS1085B to support USB accessory mode, which powers the USB bus and communicates with Android phone simultaneously.
- Support USB BC 1.2 Charging Downstream Port (CDP) advertisement, allowing the BC 1.2 CDP compatible Android phone to be charged by up to 1.5A while running data communication.

Features

- Support Apple MFi Accessory Interface Specification.
- Support Apple Accessory iAP2 protocol, featuring EA Native Transport, Device Powered, and APP launch.
- Support Apple MFi USB Role Switch.
- Support Android Open Accessory (AOA) Protocol 2.0.
- Support Apple and USB BC1.2 charging detection.
- Detection of maximum supply current from a USB port or a power adapter at 500mA, 1.0A, 1.5A, 2.1A, 2.4A; and capable of charging iDevice at 0.5/1.0/2.1/2.4A.
- Charging CDP compatible USB devices by up to 1.5A.
- SD card read and write frequencies can be configured independently from 15 to 96MHz for up to 9 levels.
- Support USB 3.0 Specification Rev 1.0
- Support USB Specification Rev 2.0, host and device.
- Support USB Mass Storage Class, Bulk-Only Transport
- Support USB 3.0 U0/U1/U2/U3 (P0/P1/P2/P3) and USB 2.0 L0/L1/L2 power saving modes.
- Support Secure Digital v1.0/v1.1/v2.0 SDHC/SDXC (Capacity up to 2TB).
- Support Secure Digital v3.0 UHS-I (Ultra High Speed) SDR12/SDR25/SDR50/DDR50/SDR104.
- Support eMMC specification v4.5 HS200 mode.
- Support two x4 SD operation in RAID or JBOD.
- Spread Spectrum Clocking (SSC) for flash media card to help minimize EMI.
- Support SPI, I2C, UART communication.
- Support firmware booting from SPI Flash or SD card.
- Support firmware upgrade to SPI Flash or SD card either from PC or from iDevice.
- Support high reliability operation with two copies of the firmware image stored in SPI Flash or SD card.
- On-chip power switch for supplying SD card power.
- Support up to four dedicated LED controllers.
- High efficiency 3.3V to 1.2V DC-DC regulator.
- On-chip 5V to 3.3V and 3.3V to 1.8V regulators.
- Package available in 48 pin 6x6 (RoHS) QFN.

NOREL Systems Ltd.

8 Huatian Road, Building B, Suite 1108, Hi-tech Information Square, Huayuan Industrial Park, Tianjin, China